


## TELE 3-WAY CUSTOM SOLDERLESS WIRING DIAGRAM

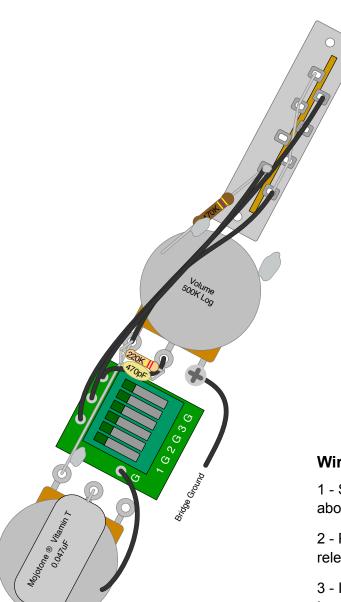

## Wiring Reference:

- 1 Neck Pickup Hot
- G Neck Pickup Ground
- 2 Bridge Pickup Hot
- G Bridge Pickup Ground
- 3 Input Jack Hot
- G Input Jack Ground

## Wiring Installation Instructions:

- 1 Strip (PVC) or push back (Cloth) insulation to expose about 3/16" 1/4" of the wire.
- 2 Push button on solderless terminal to insert wire and release button to secure
- 3 Insert ground wire from Tremolo/Bridge into the screw terminal on the volume pot. Tighten screw to secure.
- 4 Plug in and test everything before final installation.